
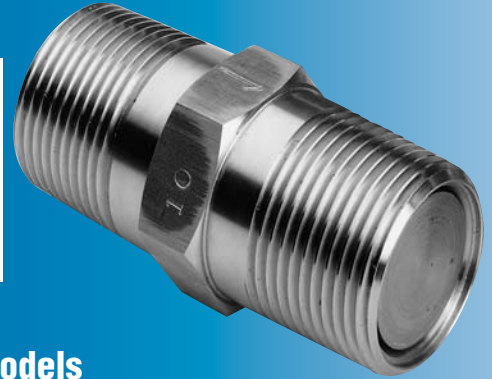


316 SS Check Valves

O-Ring Poppet Valves

Features/Benefits

- Compact length
- Spring-loaded 2 or 10 PSI
- Full range of sizes 1/4" to 1" IPS
- All 316 Stainless Steel construction
- Viton® or Teflon O-Rings as standard
Other materials available
- Pressures to 2,500 PSI
- Temperatures -15° to +400°F
- Usable on Metering pumps
- Usable as Injection Line check valves
- Custom valve inquiries invited

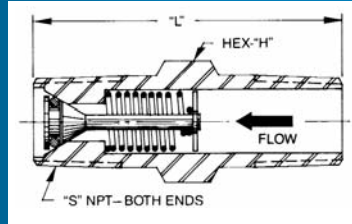


O-Ring Poppet Models

Valve Size	Crack'g Press	Part Number	Size "S"	Hex "H"	"L"	CV
1/4	2 LB.	A00101-01	1/4 - 18	5/8	1 1/2	.46
	10 LB.	A00101-02				
3/8	2 LB.	A00102-01	3/8 - 18	3/4	2 1/2	1.42
	10 LB.	A00102-02				
1/2	2 LB.	A00103-01	1/2 - 14	7/8	2 1/2	1/82
	10 LB.	A00103-02				
3/4	2 LB.	A00104-01	3/4 - 14	1 1/2	2 1/2	6.02
	10 LB.	A00104-02				
1	2 LB.	A00105-01	1 - 11 1/2	1 1/2	3 1/2	12.80
	10 LB.	A00105-02				

Ball Check Valves


Features/Benefits

- Compact length
- Spring-loaded 2 or 10 PSI
- Full range of sizes 1/4" to 1" IPS
- All 316 Stainless Steel construction
- Other ball materials available
- Easily disassembled for inspection or cleaning
- Pressures to 2,500 PSI
- Temperatures -15° to +650°F
- Usable on Metering pumps
- Usable as Injection Line check valves
- Custom valve inquiries invited

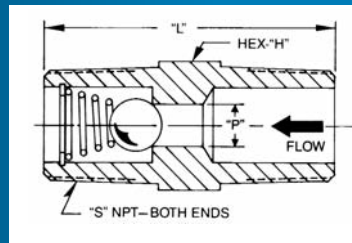

Ball Check Models

Valve Size	Crack'g Press	Part Number	"L"	Hex "H"	"S" MPT	Ball	"P"	CV
1/4	2 LB.	A00031-01	1 1/2	5/8	1/4 - 18	.250	.200	.56
	10 LB.	A00031-02						
3/8	2 LB.	A00032-01	1 1/4	3/4	3/8 - 18	.312	.250	.83
	10 LB.	A00032-02						
1/2	2 LB.	A00033-01	2 1/4	7/8	1/2 - 14	.437	.335	1.49
	10 LB.	A00033-02						
3/4	2 LB.	A00034-01	2 1/2	1 1/2	3/4 - 14	.562	.442	2.98
	10 LB.	A00034-02						
1	2 LB.	A00035-01	2 3/4	1 1/2	1 - 11 1/2	.750	.530	5.65
	10 LB.	A00035-02						

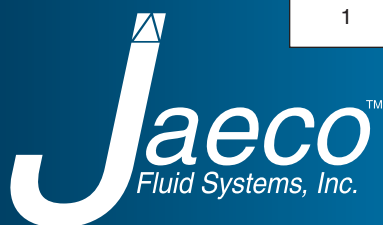

17 Lee Boulevard, Suite D • Malvern, PA 19355-1234
Toll Free: 1-877-778-3456 • Phone: 610-407-7207
Fax: 610-407-7211 • www.jaecofs.com